



HT SYNTHETIC ROOF UNDERLAYMENT


A BETTER UNDERLAYMENT FOR METAL ROOFS

- 10 times lighter per square than 30# felt
- 10 Squares per roll weighing only 20 lbs
- High temperature (HT) resistant product
- UV resistant and can be exposed for up to 6 months
- Pre-printed nailing pattern speeds installation
- 25 year warranty to shed water






Preprinted nail pattern makes installation quick and easy.

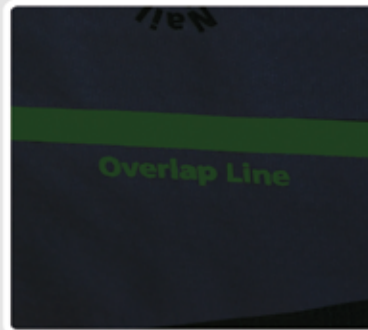

Preprinted overlap line speeds installation.

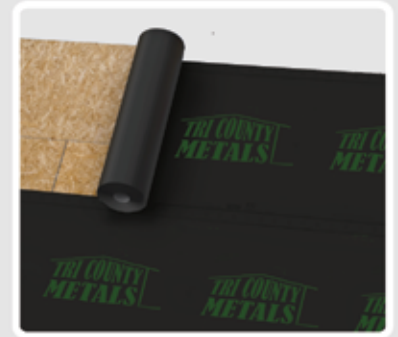

Synthetic underlayment won't dry out and crack like 30# felt will.

COMPARISON

HT Synthetic Underlayment

30# Conventional Felt

100% Polypropylene

Asphalt

20 lbs per roll - 10x lighter per sq than 30# roofing felt

60 lbs per roll

10 squares per roll - 48" wide x 250 lineal feet

2 squares per roll - 36" wide x 72 lineal feet

Hard to tear

Easy to tear

Can be left exposed for up to 6 months with no degrading

Begins to degrade immediately

25 year warranty

No warranty

Lays flat and is water resistant. Superior drapability in valleys, on ridges and hips

Puckers & wrinkles when wet. Cracks in valleys and on ridges and hips

Pre printed nailing pattern and overlap lines to speed installation

No nailing pattern

Class A fire rating

No fire rating

Saves up to 50% time in labor installation

No comparison

Florida Product Approval #FL 12512.4